



**DOORS AND WINDOWS**

UP **2** WEEKS

**FAST DELIVERY 2024**  
I EDITION

door production in 2 weeks  
Valid from 21.05.2024

The advertisement is a 3x3 grid. The top row shows a white door, a wooden door, and the 'UP 2 WEEKS' graphic. The middle row shows a white door, a blue text box with 'FAST DELIVERY 2024 I EDITION' and 'door production in 2 weeks Valid from 21.05.2024', and another white door. The bottom row shows a wooden door, a white door, and a white door in a room setting.

**POL-SKONE Sp. z o.o.**

ul. Hanki Ordonówny 8; 20-328 Lublin  
phone no.: +48 81 728 58 85; +48 81 744 30 11-13  
fax: +48 81 744 24 89; -48 81 744 39 12  
e-mail: pol-skone@pol-skone.eu  
**www.pol-skone.eu**



## RULES FOR THE PROCESSING OF FAST DELIVERY

- placing an order for an assortment included in the fast delivery promotion in a separate „order - fast” list via [www.drzwionline.pl](http://www.drzwionline.pl)
- ordering the assortment included in the fast processing promotion in standard dimensions (according to the current catalogue Better Interior and configurator [www.drzwionline.pl](http://www.drzwionline.pl) in the „quick order” tab), unless otherwise specified in the flyer
- order the assortment included in the quick delivery promotion with ventilation tubes or undercuts (according to the current catalogue Better interiors catalogue and the configurator [www.drzwionline.pl](http://www.drzwionline.pl) in the “quick order” tab), unless otherwise specified in the flyer
  - ordering the assortment included in the quick delivery promotion with standard WK, WB, WC locks - specified in the current catalogue Better Interior and the configurator [www.drzwionline.pl](http://www.drzwionline.pl) in the „quick order” tab
  - ordering the assortment included in the quick delivery promotion with standard glazing, as specified in the current catalogue Better Interior and the configurator [www.drzwionline.pl](http://www.drzwionline.pl) in the “quick order” tab
- it is not possible to make corrections to orders placed by „quick order”

ARCO - p. 10, 12



ECO TOP

SILKSTONE

IMPULS -p. 14



LAMISTONE CPL

SILKSTONE

SEDO - p. 18



UNI MAT PLUS

UNITO - p. 8



UNI MAT PLUS

HAPTIC - NEW - p. 20



UNI MAT PLUS


FIXED METAL FRAME  
FD12



DIN FRAME



DIN DUO FRAME



DECO - p. 16



LAMINATED CPL 0,2 mm

CAMBIO - p. 22



PAINTED

SENTO - NEW - p. 24



PAINTED

FIORD - p. 26



PAINTED

HARMONY - p. 4



TO PAINT BY YOURSELF

# HARMONY



## HARMONY DOORS AND FRAMES AVAILABLE IN STOCK

### LEAF TO FRAME HARMONY

---

sash price and sash dimensions

---

leaf width „80“ („80 „x2040/2050 mm), honeycomb

---

leaf width „80“ („80 „x2040/2050 mm), solid chipboard three hinges

---

### HARMONY FRAME FOR SINGLE LEAF DOORS

---

leaf dimensions and number of hinges

---

„80“ x 2040/2050 mm  
(2 covered hinges)

---

„80“ x 2040/2050 mm  
(3 covered hinges)

---

### HARMONY LEAF

- width „80“
- left or right
- opening inwards or opening outwards
- filling honeycomb (2 covered hinges)
- solid particle board (3 covered hinges)
- untreated sash in primer for individual painting
- WK magnetic lock

### HARMONY FRAME

- width „80“
- left or right
- opening inwards or opening outwards
- color: for individual painting  
(raw aluminum), painted RAL 9003 or RAL 9005

## HARMONY DOORS AND FRAMES AVAILABLE IN 2 WEEKS

### SASH TO FRAME HARMONY

leaf price and leaf dimensions

leaf width „70“, „80“ („70“-„80“ x 2040/2050 mm)  
solid chipboard, additional covered hinge

leaf width „90“ („90“ x 2040/2050 mm)  
solid chipboard

leaf width „70“, „80“ („70“-„80“ x 2040/2050 mm)  
solid chipboard, additional covered hinge + ventilation trim

leaf width „90“ („90“ x 2040/2050 mm)  
solid chipboard + vent trim

### HARMONY FRAME FOR SINGLE LEAF DOORS


leaf dimensions and number of hinges

„70“, „80“ x 2040/2050 mm (3 covered hinges)

„90“ x 2040/2050 mm (3 covered hinges)

# HIDDEN FRAME AND SASH HARMONY POL-SKONE SYSTEM

FOR SINGLE LEAF DOORS



### PARAMETERS

Mechanical class: class 2 of mechanical strength requirements, i.e., medium operating conditions.

### LEAF DESIGN

Leaf in the system without rebate (opening to the outside) or with rebate (opening to the inside). The structure of the leaf is a wooden frame clad on both sides with HDF boards. The standard filling of the leaf is honeycomb or solid chipboard. The nominal thickness of the leaf is 40 mm.

The design of the leaf allows it to flush with the surface of the frame.

### LEAF FINISH


Smooth surface in the undercoat for self-painting.

### FRAME COLORS

Concealed door frame for inward or outward opening leaves raw aluminium for self-painting in the color of the wall

### ACCESSORIES

Standard equipment:  
covered hinge (adjustable in 3 planes) satin chrome color - 2 pcs. (honeycomb) or 3 pcs (full chipboard)  
magnetic lock for a patent insert, key or WC

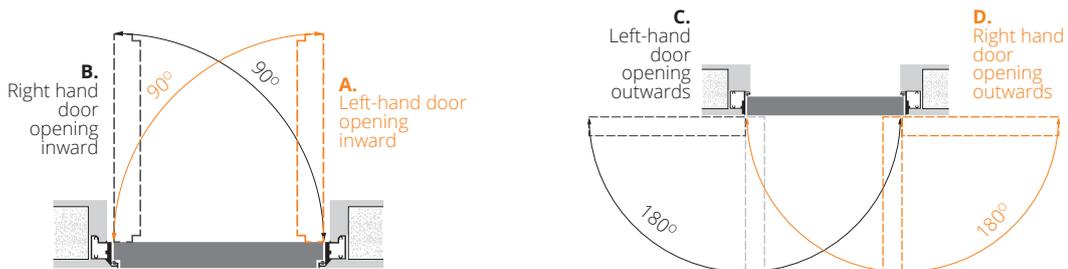


WIDTH				HEIGHT	
door dimension	S <sub>d</sub> *	S <sub>d</sub> **	S <sub>o</sub>	H <sub>d</sub>	H <sub>o</sub>
„70“	796	793	810	2062*	2070*
„80“	896	893	910	2072**	2080**
„90“	996	993	1010		

\* doors opening inwards  
\*\* doors opening outwards

S<sub>d</sub> - width of the door on the outside of the frame  
S<sub>o</sub> - width of mounting hole  
H<sub>d</sub> - door height on the outer side of the frame  
H<sub>o</sub> - height of assembly opening

# DIMENSIONS OF INTERIOR DOOR LEAVES

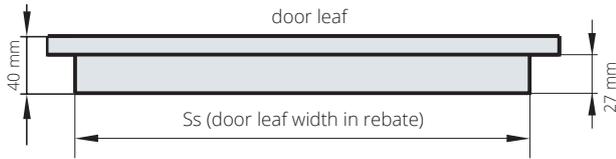


POL-SKONE rebated door leaves fit all door frames which comply with the Polish industry standards


szerokość (Ss)				wysokość w przyldze
618	718	818	918 (mm)	2020 (mm)

width (Ss)				height
625	725	825	925 (mm)	2020 (mm)


## HANDLE HEIGHT

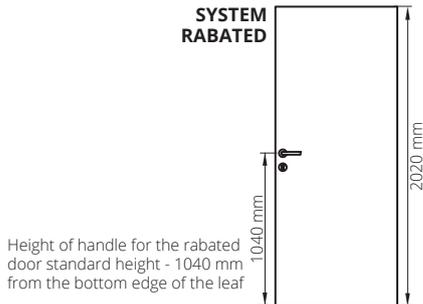


**SYMMETRY IS PARAMOUNT**  
NEW STANDARDIZED HANDLE HEIGHT IN REBATED AND NON-REBATED SYSTEMS

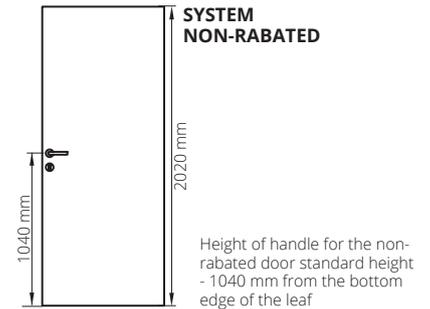


## Single leaf rebated doors - opening directions

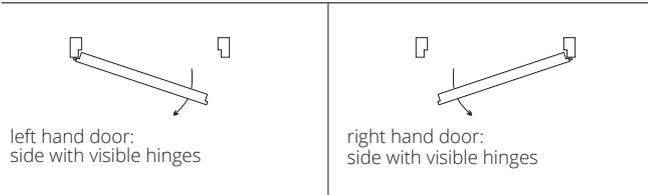


## Double leaf rebated doors - opening directions

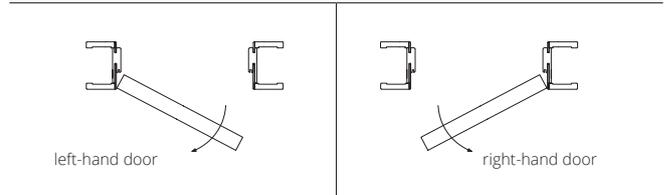



## HARMONY door - opening directions

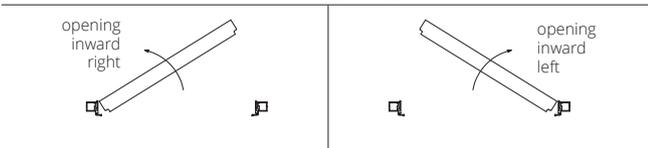


## HARMONY door - opening directions

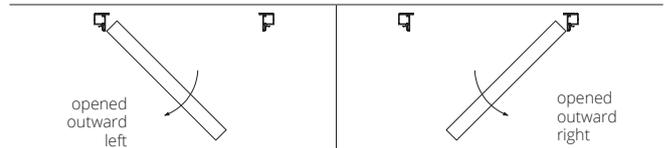

## CLEARANCE BETWEEN LEAF AND FLOOR

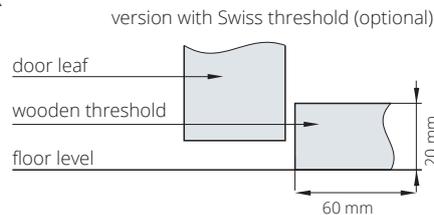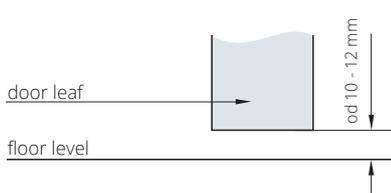


## WAYS OF JOINING BANDS




## DIN ADJUSTABLE FRAME

Version A: 60 mm (does not apply to painted)  
Version B: 80 mm (applies to painted)

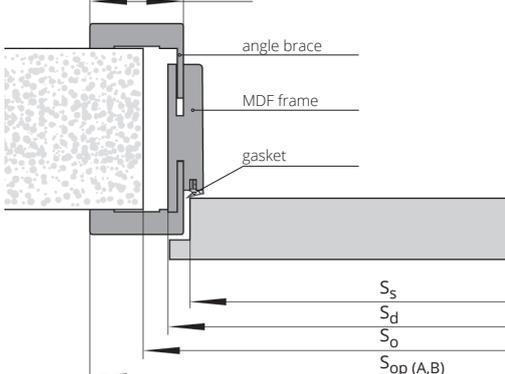

- Ss - leaf width
- Sd - door width on the outer side of the frame
- Sc - total width of the door frame
- So - width of mounting hole
- Sop - width on the outside of the frame
- Hs - leaf height
- Hd - door height on the outer side of the frame
- Hc - total height of door frame
- Ho - height of the assembly opening
- Hop - height on the outside of the frame

## FIXED METAL FRAME FD12

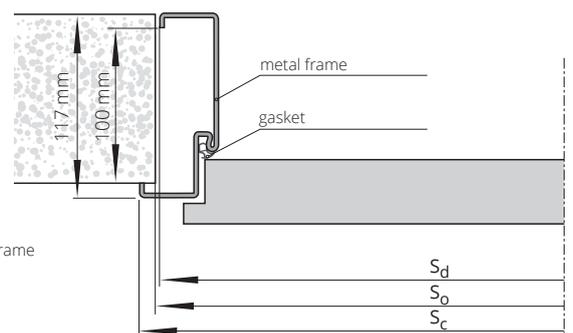

	SKIRTING BOARDS	HARMONY LEAF (p.4)	HARMONY FRAME (p.5)	UNITO (p. 8)	ARCO (p:10, 12)	CAMBIO (p:10)	SENTO (p:12)	FIORD (p:14)	IMPULS (p:20)	DECO (p:22)	SEDO (p:24)	HAPTIC (p:26)
PLATE	-	●	-	○	○	●	○	●	●	●	○	●
WOODEN FRAME	-	●	-	○	○	●	●	○	○	○	○	○
FRAMING	-	○	-	●	●	○	○	○	○	○	●	○
availability	up to 2 weeks	○	●	●	●	●	●	●	●	●	●	●
	in stock	●	●	●	○	○	○	○	○	○	○	○
system	rebate	-	○	○	●	●	●	●	●	●	●	●
	non-rabate	-	●	●	●	○	●	●	○	○	●	●

## VENTILATION OPTIONS

According to the Ordinance of the Minister of Infrastructure of 12 April 2002 on the technical conditions which must be fulfilled by buildings and their location. (Journal of Laws, 75 of 2002, item 690 as amended, Journal of Laws no 33 of 2003, item 270, Journal of Laws no 109 of 2004, item 1156), Chapter 6, §. 79. "A bathroom, washroom and separate toilet door should be openable outwards and have, subject to § 75 section 2, at least 0.8 m and a height of 2 m within the clear opening of the door frame and - in the lower part - air inlet holes with a total cross-section area not smaller than 0,022 m<sup>2</sup>"

Clearance between leaf and floor max. 35 mm

One row of ventilation tubes

ventilation trim

SED0, ARCO „80” leaf with ventilation trim

rebated sash with ventilation trim

CAMBIO DUO leaf with ventilation trim

ventilation trim

**NEW**  
ventilation trim colored in a color similar to that of the leaf, protected by moisture-proof impregnation

	A	B	C	D
„80”	818	704	825	525
„90”	918	804	925	625

VENTILATION TUBES  
made of plastic (set of 4) - designed to match the door leaf colour




Addresses of authorized installation teams at [www.pol-skone.eu](http://www.pol-skone.eu)



See videos with instructions installation



Explanation meanings pictograms



for leaves with ventilation option



# UNITO

- vertical frames made of **high quality MDF**
- **16 mm** thick panels

The door is built on a frame of high-quality MDF covered with UNI MAT PLUS surface. The top and bottom edges of the leaf are protected with foil.

UNITO door, pattern W3S, adjustable frame SYSTEM DIN



UNITO door, pattern W03, DIN adjustable frame



**MODEL** W02P W2S W02 W03P W3S W03

SYSTEM RABATED



**ADJUSTABLE FRAME  
DIN SYSTEM**

symbol	range in mm
ZP2	95-120
ZP3	120-140
ZP4	140-160
ZP5	160-180

WIDTH				
single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	848
„80”	876	846	818	948
HEIGHT				
	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2093

**NEW: ties joined at an angle of 90°  
(concerns ties version C 90°)**

SYSTEM NON-RABATED



**ADJUSTABLE FRAME  
DIN DUO SYSTEM**

symbol	range in mm
ZD2	80-85
ZD3	85-95
ZD4	95-120
ZD5	120-140
ZD6	140-160
ZD7	160-180

WIDTH				
single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	790	752	725	894
„80”	890	852	825	994
HEIGHT				
	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2113

**NEW: ties joined at an angle of 90°  
(concerns ties version C 90°)**


S<sub>s</sub> - leaf width  
S<sub>d</sub> - width of door on the outside side of doorframe  
S<sub>o</sub> - width of mounting hole  
S<sub>op</sub> - width on the outside side of the frame

H<sub>s</sub> - leaf height  
H<sub>d</sub> - door height on the outer side of the frame  
H<sub>o</sub> - height of the mounting hole  
H<sub>op</sub> - height on the outside of the band

**COLORS**




**FRAMES**

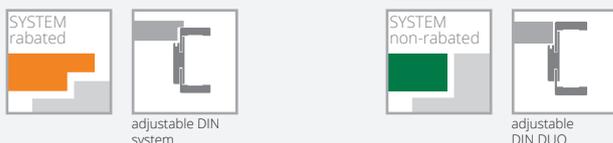

**EQUIPMENT**

STANDARD
white mat glass with a thickness of 4 mm
single-point lock, 72 mm spacing (rebate system) or magnetic (rebateless system) mortise, keyed (spacing 90 mm) or for bathroom lock (spacing 90 mm)
hinges: type B silver - for the door frame DIN system or covered DUO chrome satin („70”-„80” - 3 pcs).
no possibility of using a door closer
no possibility of using a drop seal

ADDITIONAL (for an additional charge)
ventilation trim colored in a color similar to that of the leaf, protected by moisture-proof impregnation
ventilation tubes: 258 white



for wings with ventilation option



ARCO door, pattern W02, adjustable frame SYSTEM DIN

# ARCO

W02, W02P, W2S

The door is built on a frame of high-quality MDF covered with ECO TOP surface. Vertical frame is vertically grain, horizontal panels. The top and bottom edges of the leaf are protected with foil.



frame vertical grain, horizontal panels and paneling



panels, glazing



ARCO door, pattern W2S, DIN adjustable frame



**MODEL** W02P W2S W02

**SYSTEM RABATED**



**ADJUSTABLE FRAME DIN SYSTEM**

symbol	range in mm
ZP2	95-120
ZP3	120-140
ZP4	140-160
ZP5	160-180

WIDTH				
single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	888
„80”	876	846	818	988
HEIGHT				
	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2093

**SYSTEM NON -RABATED**



**ADJUSTABLE FRAME DIN DUO SYSTEM**

symbol	range in mm
ZD2	80-85
ZD3	85-95
ZD4	95-120
ZD5	120-140
ZD6	140-160
ZD7	160-180


WIDTH				
single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	790	752	725	894
„80”	890	852	825	994
HEIGHT				
	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2113

S<sub>s</sub> - leaf width  
 S<sub>d</sub> - width of door on the outside side of doorframe  
 S<sub>o</sub> - width of mounting hole  
 S<sub>op</sub> - width on the outside side of the frame

**COLORS**




**FRAMES**

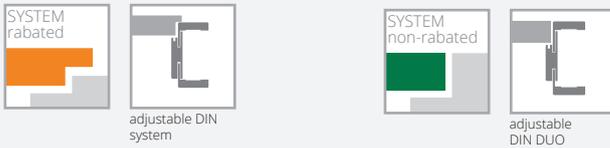

**EQUIPMENT**

STANDARD
white/brown mat glass with a thickness of 4 mm
Single point lock silver, spaced 72 mm (rebate system) or magnetic silver (rebateless system) mortise, keyed (spacing 90 mm) or for bathroom lock (spacing 90 mm)
hinges: type B - for DIN system frame, type M - for metal frame („70”-„80” - 3 pcs).
no possibility of using a door closer
no possibility of using a drop seal

ADDITIONAL (for an additional charge)
ventilation undercut colored in a color similar to that of the leaf, protected by moisture-proof impregnation
ventilation sleeves: 258 white, 141 Salinas oak, 276 Polish oak



for wings with ventilation option



ARCO door, pattern W03, adjustable frame SYSTEM DIN

# ARCO

W03, W03P, W3S

The door is built on a frame of high-quality MDF covered with ECO TOP surface. Vertical frame is vertically grain, horizontal panels. The top and bottom edges of the leaf are protected with foil.



frame vertical grain, horizontal panels and paneling



ARCO door, pattern W03, DIN adjustable frame



**MODEL** W03P W3S W03

**SYSTEM RABATED**



**ADJUSTABLE FRAME DIN SYSTEM**

symbol	range in mm
ZP2	95-120
ZP3	120-140
ZP4	140-160
ZP5	160-180

**WIDTH**

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	888
„80”	876	846	818	988
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2093

**SYSTEM NON-RABATED**



**ADJUSTABLE FRAME DIN DUO SYSTEM**

symbol	range in mm
ZD2	80-85
ZD3	85-95
ZD4	95-120
ZD5	120-140
ZD6	140-160
ZD7	160-180

**WIDTH**

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	790	752	725	894
„80”	890	852	825	994
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2113


S<sub>s</sub> - leaf width  
 S<sub>d</sub> - width of door on the outside side of doorframe  
 S<sub>o</sub> - width of mounting hole  
 S<sub>op</sub> - width on the outside side of the frame

H<sub>s</sub> - leaf height  
 H<sub>d</sub> - door height on the outer side of the frame  
 H<sub>o</sub> - height of the mounting hole  
 H<sub>op</sub> - height on the outside of the band

**COLORS**




**FRAMES**

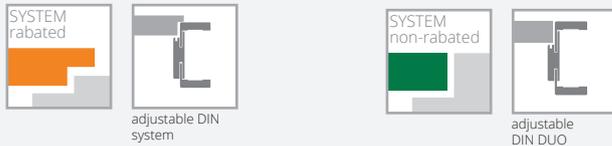

**EQUIPMENT**

STANDARD
white/brown mat glass with a thickness of 4 mm
Single point lock silver, spaced 72 mm (rebate system) or magnetic silver (rebateless system) mortise, keyed (spacing 90 mm) or for bathroom lock (spacing 90 mm)
hinges: type B silver - for DIN system frame, type M - for metal frame („70”-„80” - 3 pcs).
no possibility of using a door closer
no possibility of using a drop seal

ADDITIONAL (for an additional charge)
ventilation trim colored in a color similar to that of the leaf, protected by moisture-proof impregnation
ventilation sleeves: 258 white, 141 Salinas oak, 276 Polish oak



IMPULS doors, pattern W01, adjustable frame SYSTEM DIN

# IMPULS

The door is constructed of a wooden frame clad with two smooth HDF boards with LAMISTONE CPL, SILKSTONE surface. The standard filling is a layer with a „honeycomb” structure.



frame



IMPULS doors, pattern W01, adjustable frame SYSTEM DIN



**MODEL** W01

SYSTEM RABATED



**ADJUSTABLE FRAME DIN SYSTEM**

symbol	range in mm
ZP2	95-120
ZP3	120-140
ZP4	140-160
ZP5	160-180

WIDTH				
single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	888
„80”	876	846	818	988
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2093

SYSTEM NON-RABATED



**ADJUSTABLE FRAME DIN DUO SYSTEM**

symbol	range in mm
ZD2	80-85
ZD3	85-95
ZD4	95-120
ZD5	120-140
ZD6	140-160
ZD7	160-180


WIDTH				
single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	790	752	725	894
„80”	890	852	825	994
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2113

**S<sub>s</sub>** - leaf width  
**S<sub>d</sub>** - width of door on the outside side of doorframe  
**S<sub>o</sub>** - width of mounting hole  
**S<sub>op</sub>** - width on the outside side of the frame  
**H<sub>s</sub>** - leaf height  
**H<sub>d</sub>** - door height on the outer side of the frame  
**H<sub>o</sub>** - height of the mounting hole  
**H<sub>op</sub>** - height on the outside of the band

**COLORS**




**FRAMES**

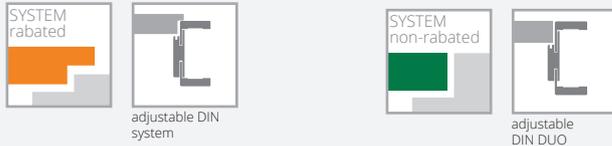

**EQUIPMENT**

STANDARD	ADDITIONAL (FOR AN ADDITIONAL CHARGE)
Single point lock silver, spaced 72 mm (rebate system) or magnetic silver (rebateless system) mortise, keyed (spacing 90 mm) or for bathroom lock (spacing 90 mm) hinges: type K silver - for DIN system frame, type M - for metal frame ("70". "80" - 2 pcs).	ventilation sleeves: 258 white, 276 Polish oak ventilation undercut colored in a color similar to that of the leaf, protected by moisture-proof impregnation



# DECO

DECO door, pattern 00, fixed metal frame

The door is constructed of a wooden frame clad with two smooth HDF boards covered with 0,2 mm thick CPL laminate. The standard filling is a „honeycomb” layer or optional solid chipboard.



DECO door, pattern 00, fixed metal frame



**MODEL** 00

SYSTEM RABATED



**FIXED METAL FRAME FD12**

frame type

FD12 big

The frame is made of the highest quality 1.5 mm thick steel sheet (FD12)

Frame painted with powder paint. Standard colors: white (RAL 9016), white (RAL 9003), gray (RAL 7047), brown (RAL 8014), graphite (RAL 7024), black (RAL 9005).


WIDTH

single-leaf door			
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>c</sub>
„80”	881	871	897
„90”	981	971	997
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>c</sub>
	2055	2060	2068

**S<sub>s</sub>** - leaf width  
**S<sub>d</sub>** - width of door on the outside side of doorframe  
**S<sub>o</sub>** - width of mounting hole  
**S<sub>op</sub>** - width on the outside side of the frame

**H<sub>s</sub>** - leaf height  
**H<sub>d</sub>** - door height on the outer side of the frame  
**H<sub>o</sub>** - height of the mounting hole  
**H<sub>op</sub>** - height on the outside of the band

laminated  
CPL  
0,2 mm



**FRAMES**



fixed-metal FD12


**EQUIPMENT**

**STANDARD**

single point lock, 72mm mortise spacing, keyed, with an insert or for a bathroom lock  
Hinges: type M - for metal frame (“80” - 2 pcs, “90” - 3 pcs).

**ADDITIONAL (for an additional charge)**

ventilation undercut colored in a color similar to that of the leaf, protected by moisture-proof impregnation  
solid particle board infill (third hinge recommended)  
Third hinge in the sash or adjustable pivot hinge  
Type M for width “80”



for wings  
with ventilation  
option



# SEDO

The door is built on a frame of high-quality MDF covered with UNI MAT PLUS surface

SEDO door, pattern W00, adjustable frame SYSTEM DIN



SEDO door model W00, DIN adjustable frame



**MODEL** W00 / V00

SYSTEM RABATED



**ADJUSTABLE FRAME  
DIN SYSTEM**

symbol	range in mm
ZP2	95-120
ZP3	120-140
ZP4	140-160
ZP5	160-180

WIDTH

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	848
„80”	876	846	818	948

HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2093

**NEW: ties joined at an angle of 90°  
(concerns ties version C 90°)**

SYSTEM NON-RABATED



**ADJUSTABLE FRAME  
DIN DUO SYSTEM**

symbol	range in mm
ZD2	80-85
ZD3	85-95
ZD4	95-120
ZD5	120-140
ZD6	140-160
ZD7	160-180

WIDTH

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	790	752	725	894
„80”	890	852	825	994

HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2113

**NEW: ties joined at an angle of 90°  
(concerns ties version C 90°)**


**COLORS**



**Ss** - leaf width  
**Sd** - width of door on the outside side of doorframe  
**So** - width of mounting hole  
**Sop** - width on the outside side of the frame

**Hs** - leaf height  
**Hd** - door height on the outer side of the frame  
**Ho** - height of the mounting hole  
**Hop** - height on the outside of the band


**FRAMES**

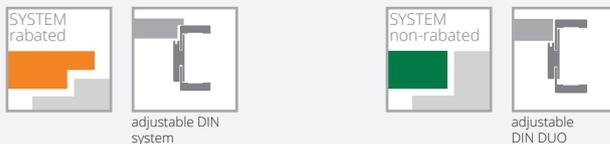

**EQUIPMENT**

**STANDARD**  
 version W00: panel thickness 12 mm  
 single-point lock, 72 mm spacing (rebate system) or magnetic (rebateless system) mortise, keyed (spacing 90 mm) or for bathroom lock (spacing 90 mm)  
 hinges: type B silver - for the door frame DIN system or covered DUO chrome satin („70”-„80” - 3 pcs).  
 no possibility of using a door closer  
 no possibility of using a drop seal

**FRAME**  
 DIN adjustable - range ZP2-ZP5, ties at an angle of 45o  
 adjustable DIN DUO - range ZD2-ZD7, ties at an angle of 45o  
**ADDITIONAL (for an additional charge)**  
 ventilation trim colored in a color similar to that of the leaf, protected by moisture-proof impregnation



# HAPTIC

- **solid construction - wooden frame**
- rich surface color UNI MAT PLUS characterized by silky haptics and a special coating resistant to fingerprints
- **adjustable hinge type C or adjustable Duo**

HAPTIC doors, pattern 00, adjustable frame SYSTEM DIN



HAPTIC doors, pattern 00, DIN adjustable frame



MODEL 00

SYSTEM RABATED



**ADJUSTABLE FRAME DIN SYSTEM**

symbol	range in mm
ZP2	95-120
ZP3	120-140
ZP4	140-160
ZP5	160-180

SYSTEM NON-RABATED



**ADJUSTABLE FRAME DIN DUO SYSTEM**

symbol	range in mm
ZD2	80-85
ZD3	85-95
ZD4	95-120
ZD5	120-140
ZD6	140-160
ZD7	160-180

WIDTH

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	848
„80”	876	846	818	948
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2093

**NEW: ties joined at an angle of 90° (concerns ties version C 90°)**

WIDTH

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	790	752	725	894
„80”	890	852	825	994
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2113

**NEW: ties joined at an angle of 90° (concerns ties version C 90°)**


S<sub>s</sub> - leaf width  
 S<sub>d</sub> - width of door on the outside side of doorframe  
 S<sub>o</sub> - width of mounting hole  
 S<sub>op</sub> - width on the outside side of the frame

H<sub>s</sub> - leaf height  
 H<sub>d</sub> - door height on the outer side of the frame  
 H<sub>o</sub> - height of the mounting hole  
 H<sub>op</sub> - height on the outside of the frame band

COLORS



FRAMES

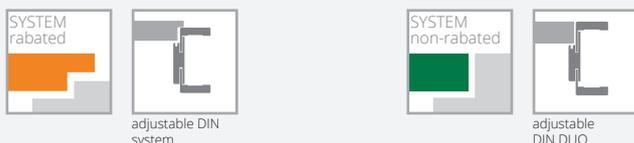

EQUIPMENT

STANDARD

Single point lock silver, spaced 72 mm (rebate system) or magnetic silver (rebateless system) mortise, keyed (spacing 90 mm) or for bathroom lock (spacing 90 mm)

Hinges: type T silver - for the door frame DIN system or covered DUO chrome satin (‘‘70’’-‘‘80’’ - 2 pcs).

FRAME

DIN adjustable - range ZP2-ZP5, ties at an angle of 45°

adjustable DIN DUO - range ZD2-ZD7, ties at an angle of 45°


ADDITIONAL (for an additional charge)

filling made of perforated chipboard

solid particle board infill (third hinge recommended)

ventilation undercut colored in a color similar to that of the leaf, protected by moisture-proof impregnation

third hinge in the sash or pivot hinge adjustable type T for width ‘‘70’’-‘‘80’’



# CAMBIO

The door is constructed of a wooden frame clad with two spatial boards covered with a surface painted with environmentally friendly acrylic paints in RAL 9003 color. The standard filling is a perforated particle board.



CAMBIO doors, pattern 00, adjustable frame SYSTEM DIN DUO

standard connection of bands at an angle of 45o DIN DUO door frame



CAMBIO doors, pattern 00, adjustable frame SYSTEM DIN DUO



**MODEL** 00 00 with ventilation undercut

SYSTEM RABATED



**ADJUSTABLE FRAME  
DIN SYSTEM**

symbol	range in mm
ZP2	95-120
ZP3	120-140
ZP4	140-160
ZP5	160-180

**WIDTH**

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	888
„80”	876	846	818	988
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2093

SYSTEM NON-RABATED



**ADJUSTABLE FRAME  
DIN DUO SYSTEM**

symbol	range in mm
ZD2	80-85
ZD3	85-95
ZD4	95-120
ZD5	120-140
ZD6	140-160
ZD7	160-180

**WIDTH**

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	790	752	725	894
„80”	890	852	825	994
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2113


**S<sub>s</sub>** - leaf width  
**S<sub>d</sub>** - width of door on the outside side of doorframe  
**S<sub>o</sub>** - width of mounting hole  
**S<sub>op</sub>** - width on the outside side of the frame

**H<sub>s</sub>** - leaf height  
**H<sub>d</sub>** - door height on the outer side of the frame  
**H<sub>o</sub>** - height of the mounting hole  
**H<sub>op</sub>** - height on the outside of the band

**COLORS**




**FRAMES**

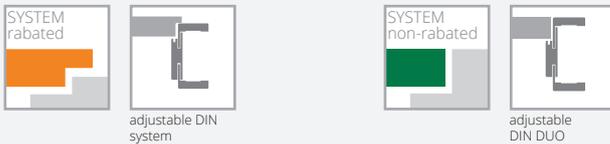

**EQUIPMENT**

**STANDARD**  
 filling: perforated chipboard  
 Single point lock silver, spaced 72 mm (rebate system) or magnetic silver (rebateless system) mortise, keyed (spacing 90 mm) or for bathroom lock (spacing 90 mm)  
 Hinges: type K silver - for the door frame DIN system or covered DUO chrome satin („70”-„80” - 2 pcs).

**FRAME**  
 DIN adjustable - range ZP2-ZP5, ties at an angle of 45o  
 adjustable DIN DUO - range ZD2-ZD7, ties at an angle of 45o



# SENTO

The door is constructed of a wooden frame clad with two spatial boards covered with a surface painted with environmentally friendly acrylic paints in RAL 9003 color.



SENTO door, pattern V0, adjustable frame SYSTEM DIN

standard connection of bands at an angle of 45° DIN DUO door frame



SENTO door, pattern V0, adjustable frame SYSTEM DIN



MODEL V0

SYSTEM RABATED



**ADJUSTABLE FRAME  
DIN SYSTEM**

symbol	zakres w mm
ZP2	95-120
ZP3	120-140
ZP4	140-160
ZP5	160-180

WIDTH

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	888
„80”	876	846	818	988
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2093

SYSTEM NON-RABATED




**ADJUSTABLE FRAME  
DIN DUO SYSTEM**

symbol	zakres w mm
ZD2	80-85
ZD3	85-95
ZD4	95-120
ZD5	120-140
ZD6	140-160
ZD7	160-180

WIDTH

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	790	752	725	894
„80”	890	852	825	994
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2113


COLORS



S<sub>s</sub> - leaf width  
S<sub>d</sub> - width of door on the outside side of doorframe  
S<sub>o</sub> - width of mounting hole  
S<sub>op</sub> - width on the outside side of the frame

H<sub>s</sub> - leaf height  
H<sub>d</sub> - door height on the outer side of the frame  
H<sub>o</sub> - height of the mounting hole  
H<sub>op</sub> - height on the outside of the band


FRAMES

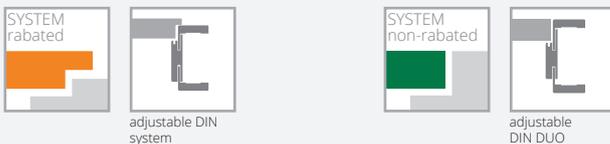

EQUIPMENT

STANDARD
filling: honeycomb
Single point lock silver, spaced 72 mm (rebate system) or magnetic silver (rebateless system) mortise, keyed (spacing 90 mm) or for bathroom lock (spacing 90 mm)
Hinges: type K silver - for the door frame DIN system or covered DUO chrome satin (”70”-”80” - 2 pcs).
FRAME
DIN adjustable - range ZP2-ZP5, ties at an angle of 45o
adjustable DIN DUO - range ZD2-ZD7, ties at an angle of 45o

ADDITIONAL (for an additional charge)
ventilation undercut colored in a color similar to that of the leaf, protected by moisture-proof impregnation



FIORD door, pattern 00, adjustable frame SYSTEM DIN

# FIORD

The door is constructed of a wooden frame clad with two spatial boards covered with a surface painted with environmentally friendly acrylic paints from RAL and NCS palettes. The standard filling is a layer with a structure of "honeycomb".



leaf profile



standard connection of bands at an angle of 45o DIN DUO door frame



FIORD door, pattern 00, adjustable frame SYSTEM DIN



MODEL 00

SYSTEM RABATED



**ADJUSTABLE FRAME  
DIN SYSTEM**

symbol	range in mm
ZP2	95-120
ZP3	120-140
ZP4	140-160
ZP5	160-180

WIDTH

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	776	746	718	888
„80”	876	846	818	988
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2093

SYSTEM NON-RABATED



**ADJUSTABLE FRAME  
DIN DUO SYSTEM**

symbol	range in mm
ZD2	80-85
ZD3	85-95
ZD4	95-120
ZD5	120-140
ZD6	140-160
ZD7	160-180

WIDTH

single-leaf door				
type	S <sub>o</sub>	S <sub>d</sub>	S <sub>s</sub>	S <sub>op</sub>
„70”	790	752	725	894
„80”	890	852	825	994
HEIGHT	H <sub>o</sub>	H <sub>d</sub>	H <sub>s</sub>	H <sub>op</sub>
	2055	2043	2020	2113

**COLORS**



S<sub>s</sub> - leaf width  
S<sub>d</sub> - width of door on the outside side of doorframe  
S<sub>o</sub> - width of mounting hole  
S<sub>op</sub> - width on the outside side of the frame

H<sub>s</sub> - leaf height  
H<sub>d</sub> - door height on the outer side of the frame  
H<sub>o</sub> - height of the mounting hole  
H<sub>op</sub> - height on the outside of the band

**FRAMES**



adjustable DIN system



adjustable DIN DUO

**EQUIPMENT**

**STANDARD**

Single point lock silver, spaced 72 mm (rebate system) or magnetic silver (rebateless system) mortise, keyed (spacing 90 mm) or for bathroom lock (spacing 90 mm)  
hinges: type K silver - for DIN system frame, type M - for metal frame („70”-„80” - 2 pcs).

**ADDITIONAL (for an additional charge)**

ventilation undercut colored in a color similar to that of the leaf, protected by moisture-proof impregnation

# OTHER CATALOGS

INTERIOR DOOR  
, ENTRY DOOR  
TECHNICAL DOOR  
AND FRAMES



EXTERIOR DOORS,  
WOODEN, WOODEN-  
ALUMINIUM WINDOWS



POL-SKONE Sp. z o.o.

Hanki Ordonówny 8 Street; 20-328 Lublin, POLAND  
phone no.: +48 81 728 52 85; +48 81 744 30 11-13

fax: +48 81 744 24 89; +48 81 744 39 12

e-mail: [pol-skone@pol-skone.eu](mailto:pol-skone@pol-skone.eu)

[www.pol-skone.eu](http://www.pol-skone.eu)

This Product Catalog is valid as of 21.05.2024 (as of this date, previous POL-Skone catalogs are no longer valid).

This publication does not constitute an offer within the meaning of the law and is for information purposes only. The manufacturer reserves the right to make changes.